

SM537-1 ADSL Line Transformers



Features



- For use with Analog Devices AD20msp930 ADSL Chipset (Central Office)
- Excellent Total Harmonic Distortion (THD) Performance
- SMT and Small size package
- Designed to meet UL1950 and EN60950 supplementary insulation requirements for voltages up to 250 Vrms maximum

ELECTRICAL SPECIFICATIONS AT 25°C:

OPERATING TEMP: -40°C to +85°C

TURNS RATIO (10-7):(1-4) OCL @10kHz, 0.1V (1-4) WITH (2-3) SHORTED (10-7) WITH (8-9) SHORTED LEAKAGE INDUCTANCE @100kHz 0.1V (10-7) WITH (2-3), (1-4), (8-9) SHORTED LONGITUDINAL BALANCE 10kHz TO 1.1MHz INSERTION LOSS @300kHz ISOLATION VOLTAGE (MAX) LOAD RESISTANCE DC RESISTANCE (1-4) WITH (2-3) SHORTED (10-7) WITH (8-9) SHORTED THD LINEARITY @30kHz APPLICATION	1 : 1.1±2% 2.03mH MIN 1.75mH MIN 7.5µH MAX 50dB MIN <0.5dB 1500 Vrms 100Ω 1.30Ω MAX 1.50Ω MAX -80dB TYP CO
---	---

OUTLINE DIMENSIONS

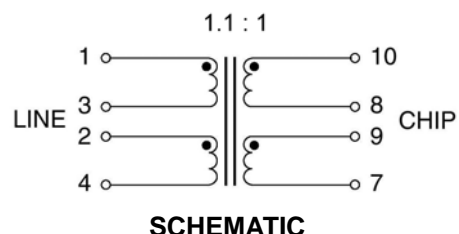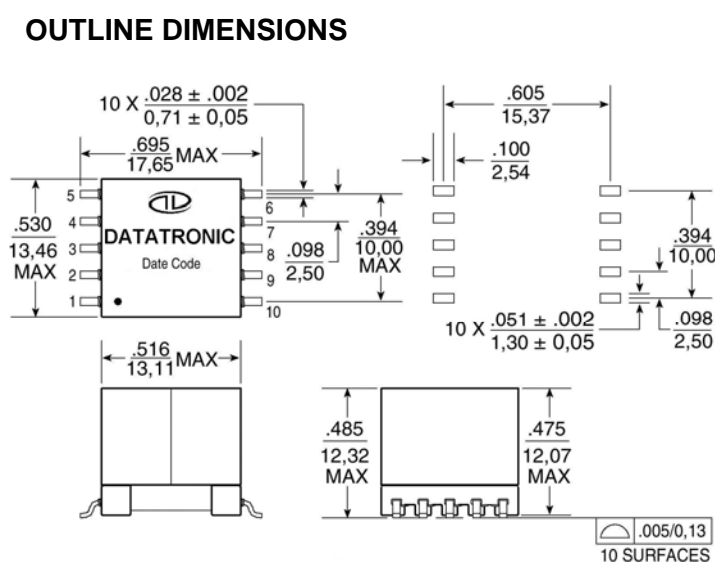

- NOTES:
1. Dimensions are shown in inches/millimeters Unless otherwise specified, tolerance = Inches: ±0.010 = Millimeters: ±0,25
 2. For non-RoHS parts replace SM prefix with 42- (e.g. SM537-1 becomes 42-537-1)
 3. Terminal finish is compliant to RoHS requirements. Solder in accordance with J-STD-020C.